

---

**216007****QSEF2/0****ULTRA-RAPID ELECTRIC SALAMANDER CLOSED  
ON 3 SIDES (QSEF)**

---



- Stainless steel structure closed on 3 sides for greater energy savings and faster cooking times.
- Ultra-rapid infrared heating elements installed on the upper plate, protected by a glass ceramic plate.
- On first startup, the set operating temperature is reached in just 20 seconds. For subsequent uses, it takes just 5 seconds, leading to substantial energy savings.
- Chrome-plated steel rod grid with heat-resistant handles (it can be positioned at 2 different heights) and removable grease collection container.
- Rubberised plastic feet.
- Wall installation brackets (optional)
- A salamander is a versatile appliance used for cooking au gratin, keeping ready-to-serve dishes warm, finishing baked dishes like lasagna and flans, as well as grilling and finishing meats such as hamburgers, steaks, sausages, and cutlets.
- Stainless steel structure closed on 3 sides for greater energy savings and faster cooking times.
- Ultra-rapid infrared heating elements installed on the upper plate, protected by a glass ceramic plate.
- On first startup, the set operating temperature is reached in just 20 seconds. For subsequent uses, it takes just 5 seconds, leading to substantial energy savings.
- Chrome-plated steel rod grid with heat-resistant handles (it can be positioned at 2 different heights) and removable grease collection container.
- Rubberised plastic feet.
- Wall installation brackets (optional)


TECHNICAL DATA

TOTAL POWER	4 kW	ELECTRIC POWER	4 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 2N ~ V
GUIDES	n° 2	HEATING PLATES	n° 1
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²	COOKING SURFACE	63x39 cm
TIMER	0-30 min	ELECTRIC CABLE TYPE	H07 RN-F
HEATING ZONES	n° 1	ELECTRICAL CONNECTION HEIGHT (Y)	0 mm
WIDTH	79 cm	DEPTH	42 cm
HEIGHT	39 cm	PACKAGE WIDTH	85,0 cm
PACKAGE DEPTH	49,0 cm	PACKAGE HEIGHT	46,0 cm
NET WEIGHT	22,7000 kg	GROSS WEIGHT	25 kg
VOLUME	0,1900 m³	HARMONISED CODE	84198180

ACCESSORIES

9008      PAIR OF WALL BRACKETS FOR SALAMANDERS (QSEF-SEF)

INSTALLATION SCHEMES

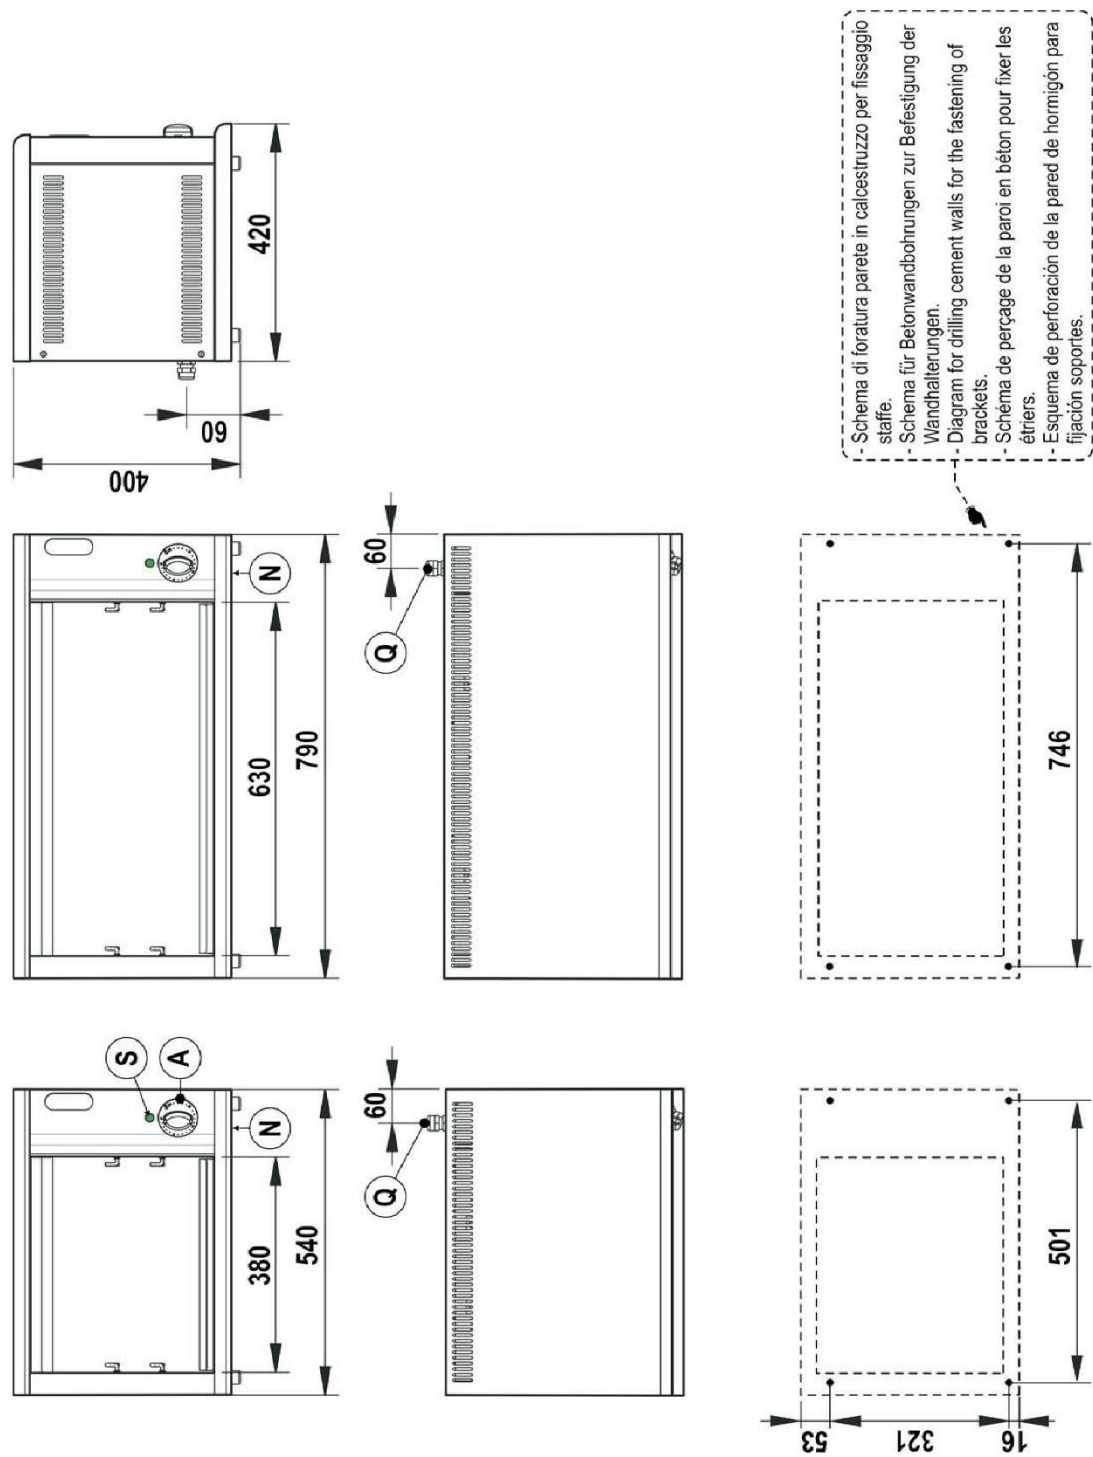

Q = Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrée câble électrique | Entrada cable eléctrico.

Fig.1 | Abb.1 | pvc.1 - 5415.694.00