316137 PIW4E9 WOK INDUCTION BOILING TOP

- Freestanding wok induction boiling top (40 cm).
- Height-adjustable rubberised plastic feet (15-25 m).
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Glass ceramic top (Ø 30 and 6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 5 kW single area.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other wok types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED light for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction wok pans.
- Technical compartment for easy connection to the electrical network.
- Avoid placing above ovens or refrigerated bases.

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

TECHNICAL DATA

TOTAL POWER	5 kW	ELECTRIC POWER	5 kW
FREQUENZA (HZ)	50/60	TENSIONE (V)	400 3N ~
POTENZA ZONE COTTURA (N°-KW)	1x5	DIMENSIONE VANO (LXPXH) (CM)	33x76,1x39,5
NUMERO ZONE COTTURA (N°)	1	SEZIONE MINIMA CAVOALIMENTAZIONE (N° - MM²)	4 x 1,5
TIPO CAVO	H07 RN-F	CAMPO_0079	0001
CAMPO_0165	35	CAMPO_0166	329
CAMPO_0167	-75	FOOT HEIGHT	15 mm
REGOLAZIONE_PIEDINO (MM)	15/25	GRADO_IPX	4
WIDTH	40 cm	DEPTH	90 cm
HEIGHT	28 cm	PACKAGE WIDTH	101 cm
PACKAGE DEPTH	46 cm	PACKAGE HEIGHT	59 cm
PESO NETTO (KG)	30	PESO LORDO (KG)	38
NOMENCLATURA COMBINATA	84198180		

ACCESSORIES

399569 ADJUSTABLE WATER TAP FOR KITCHENS WITH A FLUE
399573 PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

INSTALLATION SCHEMES

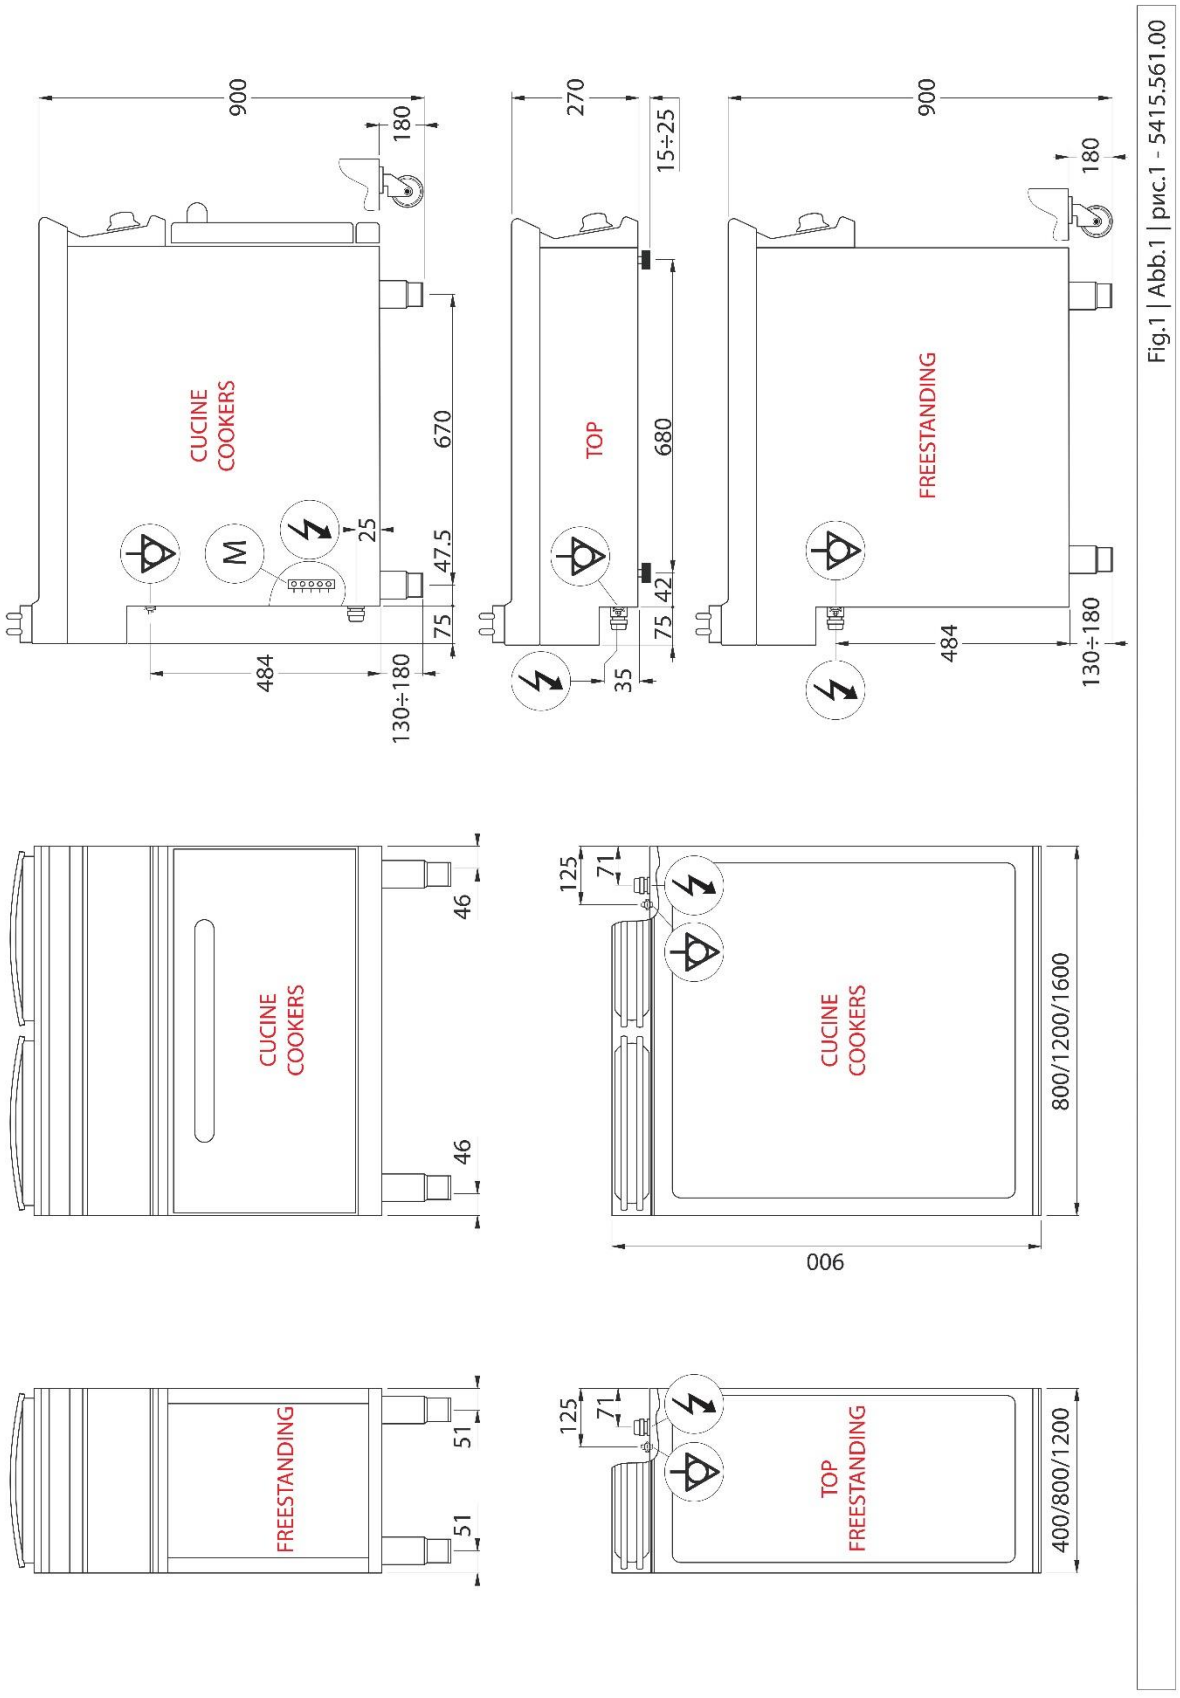

Fig.1 | Abb.1 | рис.1 - 5415.561.00