


**616111**

PIN35E7N

**2-ZONE INDUCTION BOILING TOP (TOP VERSION)**



- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other cook top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction boiling pans with a base diameter ranging between 12 cm and 28 cm.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment for easy connection to the electrical network.
- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Glass ceramic boiling top (6 mm thick) hermetically sealed to the top for maximum hygiene and ease of cleaning.
- 3.5 kW independent cooking zones each.
- Power regulator 0-6-infinite.
- Increased heating speed compared to other cook top types.
- Heating is enabled only when in contact with the pan, saving energy and reducing overheating.
- Front air filter drawer easily accessible for cleaning and replacement.
- LED lights for detecting pans and signalling operation and errors.
- To optimise efficiency, use high-quality induction boiling pans with a base diameter ranging between 12 cm and 28 cm.
- Height-adjustable rubberised plastic feet (15-25 mm).
- Technical compartment for easy connection to the electrical network.

TECHNICAL DATA

TOTAL POWER	7 kW	ELECTRIC POWER	7 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3 ~ V
COOKING ZONE POWER	2x3,5 n°- kW	NUMBER OF COOKING ZONES	n° 2
MINIMUM POWER CABLE CROSS-SECTION	4 x 1,5 n° - mm²	ELECTRIC CABLE TYPE	H07 RN-F
MAXIMUM RELATIVE AIR HUMIDITY	30-90 %	ELECTRICAL CONNECTION HEIGHT (H)	26 mm
ELECTRICAL CONNECTION HEIGHT (X)	307 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-78 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
IPX RATING	3	WIDTH	35 cm
DEPTH	70 cm	HEIGHT	28 cm
PACKAGE WIDTH	80 cm	PACKAGE DEPTH	41,0 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	24,1 kg
GROSS WEIGHT	28,6 kg	VOLUME	0,1700 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	196.0 W
SENSIBLE HEAT RELEASE	490.0 W	STEAM RELEASE	287.0 g/h

ACCESSORIES

220585    JOINT

INSTALLATION SCHEMES

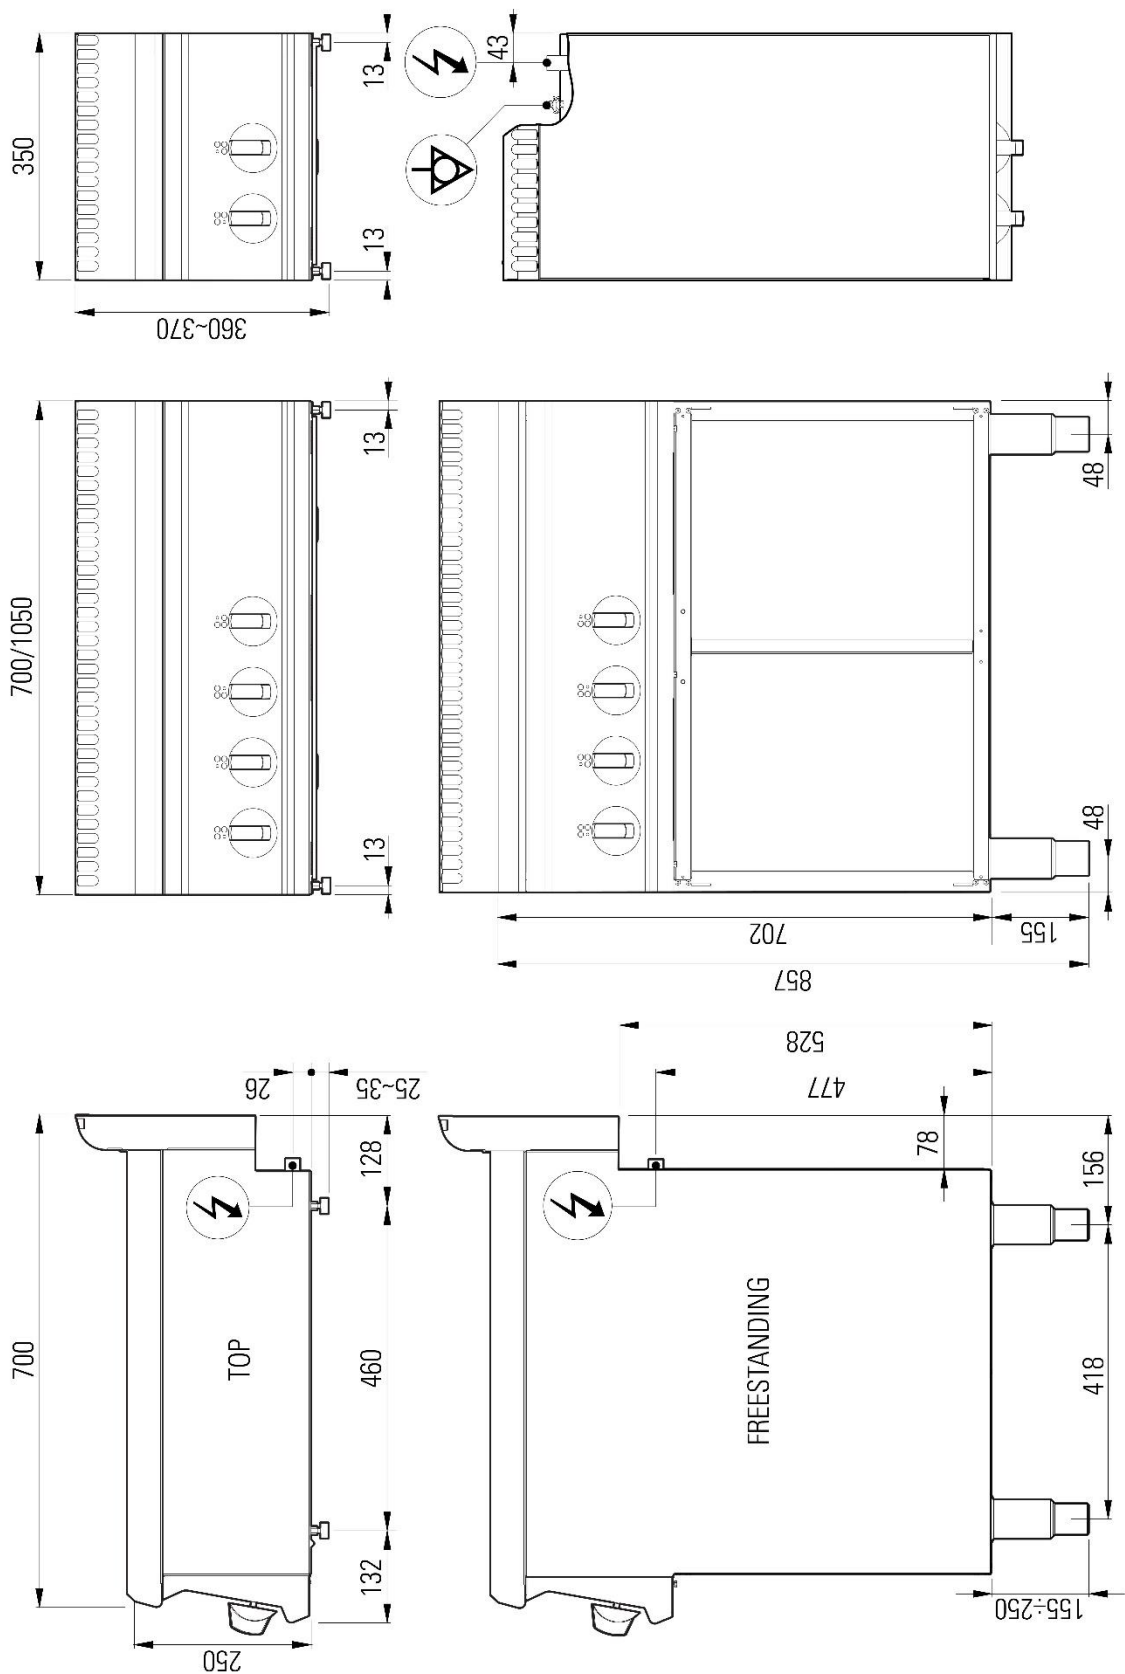


Fig.1 | Abb.1 | рис.1 - 5415.661.00