


713089

PPF8GG7

GAS SOLID TOP COOKER ON GN2/1 GAS STATIC OVEN WITH 1 GRID



- Solid top cooker (80 cm) on a GN 2/1 gas static oven.
- Non-deformable cast iron plate (1 cm thick).
- Cast iron central burner (9 kW) to reach a temperature of 400°C at the plate centre, with pilot burner and safety thermocouple.
- Piezoelectric ignition.
- Valved gas cock.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 GAS STATIC OVEN

>> AISI 304 stainless steel oven door.

>> Stainless steel cooking chamber and long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Equipped with thermostatic valve, 150-290°C regulation

>> Fitted with thermostatic valve, 150-290°C adjustment.

>> Pilot burner ignition with a thermocouple through a piezoelectric device.

>> Stainless steel removable side tray racks.

>> 1 grid included.

• AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.

• AISI 304 stainless steel control panel and side panels.

• Technical compartment to facilitate connection to the gas network.

• The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.

• The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	16 kW	GAS POWER	16 kW
OVEN POWER	7 kW	BOILING TOP POWER	9 kW
GAS PLATE POWER	1x9 n°- kW	TRAY CAPACITY	n° 4xGN2/1
NATURAL GAS CONSUMPTION	1,69 m³/h	COOKING CHAMBER DIMENSIONS	57,5x65x30 cm
OVEN DIMENSIONS	GN2/1	ELECTRIC PLATE DIMENSIONS	74,2x55,8 cm
GUIDES	n° 4	NUMBER OF BURNERS	n° 1 (plate)
VERTICAL DISTANCE BETWEEN TRAYS	6 cm	OVEN TEMPERATURE RANGE	150÷290 °C
OVEN TYPE	Static	PLATE TYPE	Cast iron
HEATING ZONES	n° 1	CE GAS CERTIFICATE NUMBER	CE-0085BO0092
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	650 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-580 mm	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	0 mm	GAS CONNECTION HEIGHT (X)	766 mm
GAS CONNECTION HEIGHT (Y)	-412 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	80 cm	DEPTH	70 cm
HEIGHT	90 cm	PACKAGE WIDTH	85,0 cm
PACKAGE DEPTH	82,0 cm	PACKAGE HEIGHT	114,0 cm
NET WEIGHT	118,0000 kg	GROSS WEIGHT	140,0000 kg
VOLUME	0,7900 m³	HARMONISED CODE	84198180
LPG CONSUMPTION	1.26 m³/h		

ACCESSORIES

220590	EXTRA OVEN GRID GN2/1 (53X63CM)
619012	GN2/1 INOX TRAY
799506	PAIR OF CLOSING ELEMENTS (L=70CM)

INSTALLATION SCHEMES

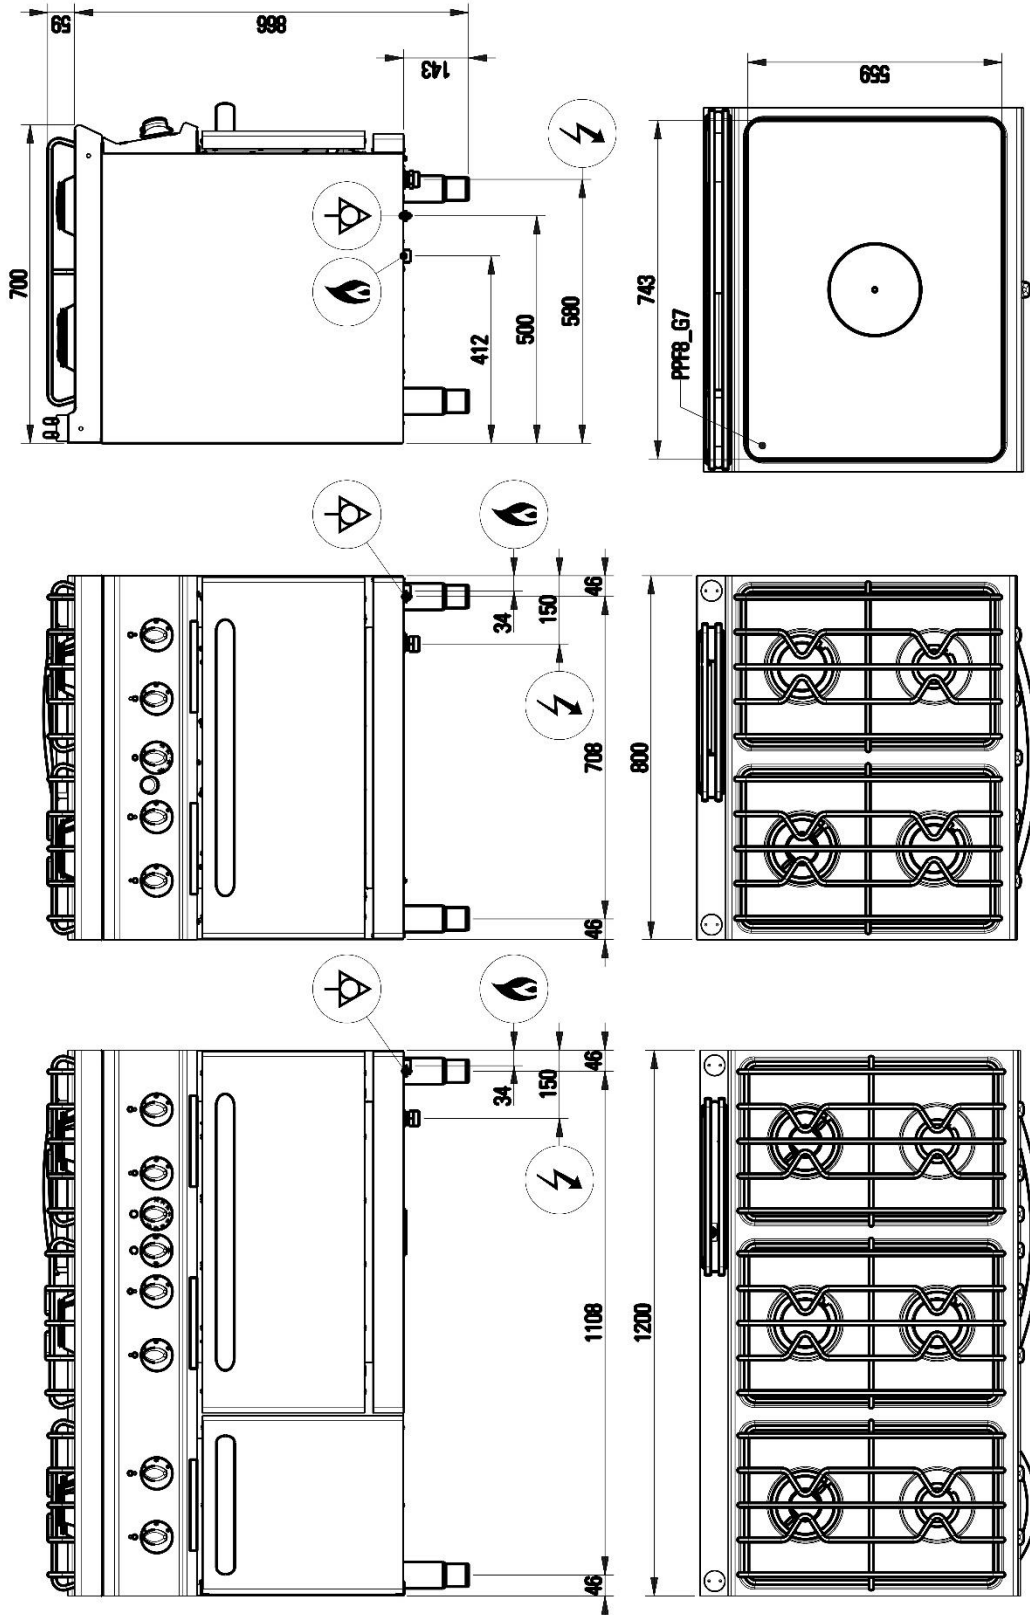


Fig.1 | Abb.1 | pnc.1 - 5415.647.00