## **TECNO74**



713196	PCH4FG7	FREESTANDING 2-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRID ON OPEN CABINET
	@IMMAGINE_PRODOTTO @DISPOSIZIONE_POTENZE	<ul> <li>Freestanding 2-burner gas boiling top (40 cm) on an open cabinet.</li> <li>High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW</li> <li>Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.</li> <li>Main burner ignition via always-on pilot burner with safety thermocouple.</li> <li>Valved gas cock.</li> <li>Setup for installing a water tap.</li> <li>Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.</li> <li>AISI 304 stainless steel height-adjustable feet (133/195 mm).</li> <li>@TESTO_LINEA</li> <li>@TESTO_FAMIGLIA</li> </ul>

## TECHNICAL DATA

TOTAL POWER	12,5 kW	GAS POWER	12,5 kW
OPEN BURNER POWER	1x5 + 1x7,5 n°- kW	BOILING TOP POWER	12,5 kW
NATURAL GAS CONSUMPTION	1,32 m <sup>3</sup> /h	LPG CONSUMPTION	0.99 kg/h
CABINET DIMENSIONS	33x57,4x39,5 cm	NUMBER OF BURNERS	n° 2
BOILING PAN SUPPORT	RAAF enamelled cast iron	GAS CONNECTION DIAMETER	1/2"G EN10226-1
GAS CONNECTION HEIGHT (H)	660 mm	GAS CONNECTION HEIGHT (X)	366 mm
GAS CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	81 cm	PACKAGE DEPTH	47 cm
PACKAGE HEIGHT	115 cm	NET WEIGHT	32,5 kg
GROSS WEIGHT	45,5 kg	VOLUME	0,44 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	1500.0 W
SENSIBLE HEAT RELEASE	3750.0 W	STEAM RELEASE	2200.0 g/h

ACCESSORIES

## INSTALLATION SCHEMES

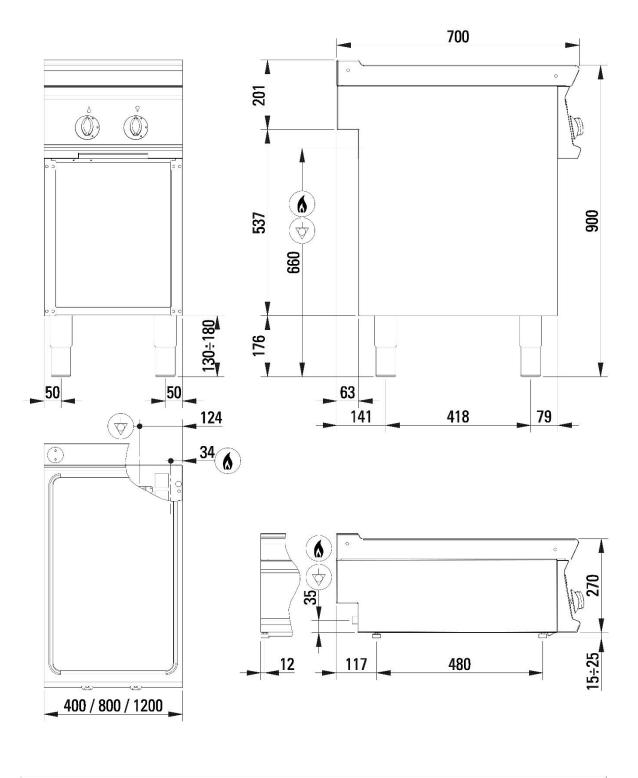


Fig.1 | Abb.1 | рис.1 - 5415.649.00