


713205

PCH12SFG7

**FREESTANDING SUPER 6-BURNER HERMETIC GAS
BOILING TOP WITH CAST IRON GRIDS ON OPEN
CABINET**

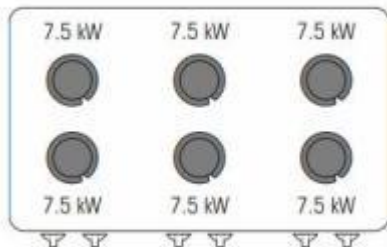

- Piano cottura a gas 6 fuochi freestanding da 120 cm, versione SUPER.
- Bruciatori ermetici con basamento in ghisa e ghiera spartifiamma in ottone monocorona da 7,5kW.
- Piano di lavoro stampato in profondità per evitare traboccamenti e con angoli arrotondati per la massima igiene e facilità di pulizia.
- Accensione del bruciatore principale tramite fiamma pilota dotata di termocoppia di sicurezza.
- Rubinetto a gas valvolato.
- Griglie posapentole in ghisa smaltate per essere resistenti agli acidi, agli alcali e alla fiamma.
- Predisposizione per installazione colonnina d'acqua.
- Piedini in acciaio inossidabile AISI 304 regolabili in altezza 133/195 mm.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.

TECHNICAL DATA

TOTAL POWER	45 kW	GAS POWER	45 kW
OPEN BURNER POWER	6x7,5 n°- kW	BOILING TOP POWER	45 kW
NATURAL GAS CONSUMPTION	4,76 m³/h	LPG CONSUMPTION	3.55 kg/h
CABINET DIMENSIONS	113x57,4x39,5 cm	NUMBER OF BURNERS	n° 6
BOILING PAN SUPPORT	RAAF enamelled cast iron	GAS CONNECTION DIAMETER	3/4"G EN10226-1
GAS CONNECTION HEIGHT (H)	660 mm	GAS CONNECTION HEIGHT (X)	1166 mm
GAS CONNECTION HEIGHT (Y)	-63 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	WIDTH	120 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	125,0 cm	PACKAGE DEPTH	80 cm
PACKAGE HEIGHT	113 cm	NET WEIGHT	93,7 kg
GROSS WEIGHT	116,6 kg	VOLUME	1,13 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	5400.0 W
SENSIBLE HEAT RELEASE	13500.0 W	STEAM RELEASE	7920.0 g/h

ACCESSORIES

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

INSTALLATION SCHEMES

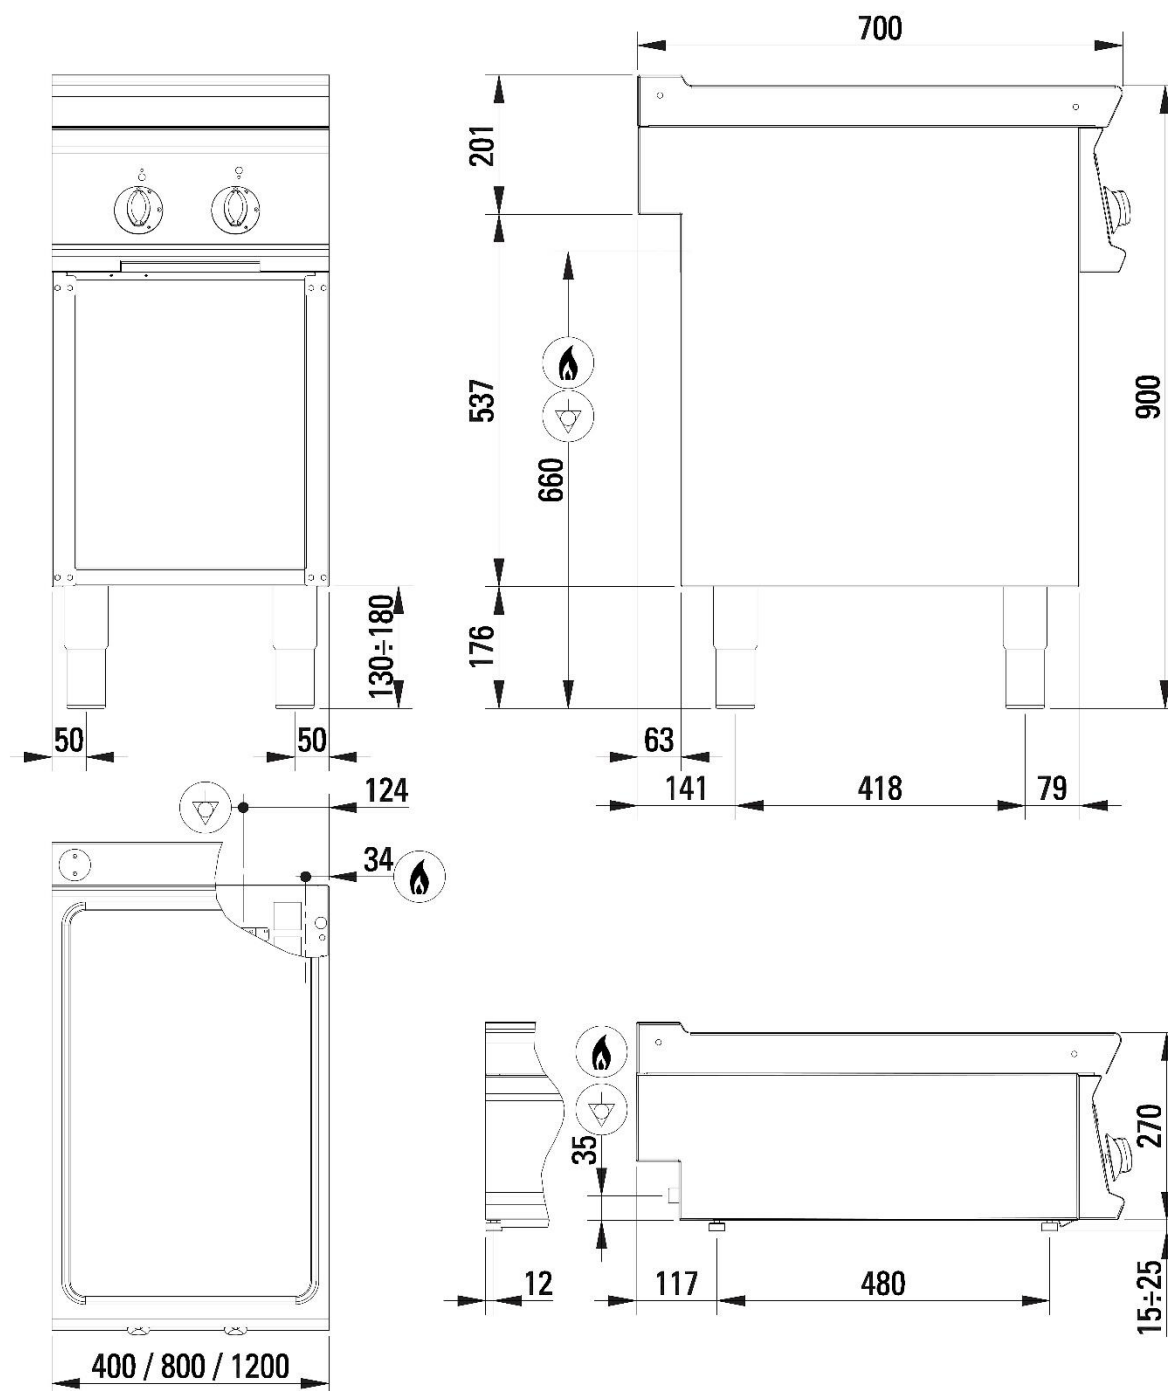


Fig.1 | Abb.1 | рис.1 - 5415.649.00