716172 GD4FE7N

FREESTANDING ELECTRIC CONTACT GRILL WITH WATER ON OPEN CABINET

- Freestanding electric water grill with direct cooking on heating elements on a 40 cm open cabinet.
- Power: 4.1 kW.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- AISI304 stainless steel tank seamlessly welded to the AISI 304 stainless steel top with Scotch Brite finish.
- Tilting armoured heating elements with an oval profile for direct cooking. They are made of AISI 304L stainless steel with low carbon content to ensure excellent resistance to corrosion. Moreover, they comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- Safety micro switch in the raised position of the heating elements.
- Automatic water filling with solenoid valve and reducer with a 0.1 l/min capacity.
- Water drain in the centre of the tank with 1 ½ inch pipe. Regulation of the water level in the tank through a removable and washable overflow.
- Equipped with a wire mesh filter, the overflow prevents larger food residues from obstructing the drain and makes it easier to clean the tank.
- Operating thermostat with automatic reset serving as an empty tank safety device.
- Red light on the control panel indicating empty tank.
- Green light indicating voltage presence.
- Orange light indicating that the heating elements are heating up.
- Energy regulator 0-6-INFINITE which simultaneously activates the heating element and tank water filling. Maximum temperature 400°C.
- Removable splashback on 3 sides included.
- A stainless steel scraper shaped is included as per standard. It is shaped as the heating element profile to facilitate cleaning, and it can also be used to lift the heating element unit.
- Plastic elbow fitting for rear draining, designed for high-temperature use, included.
- The electric components, such as solenoid valves and contactors, are positioned near the control panel to facilitate maintenance.
- Technical compartment for easy connection to the electrical network.

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

TECHNICAL DATA

TOTAL POWER	4,1 kW	ELECTRIC POWER	4,1 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
CAMPO_0106	0001	CAMPO_0146	0004
CAMPO_0025	0001	MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²
COOKING SURFACE	26,8x44,7 cm	ELECTRIC CABLE TYPE	H07 RN-F
HEATING ZONES	n° 1	WATER CONNECTION POSITION	63,9cm
WATER DRAIN POSITION	65,2cm	ELECTRICAL CONNECTION HEIGHT (H)	484 mm
ELECTRICAL CONNECTION HEIGHT (X)	321 mm	ELECTRICAL CONNECTION HEIGHT (Y)	-62 mm
WATER CONNECTION DIAMETER	3/4"	WATER CONNECTION HEIGHT (H)	484 mm
WATER CONNECTION HEIGHT (X)	48 mm	WATER CONNECTION HEIGHT (Y)	-62 mm
DRAIN DIAMETER	1" 1/2	DRAIN CONNECTION HEIGHT (H)	497 mm
DRAIN CONNECTION HEIGHT (X)	200 mm	DRAIN CONNECTION HEIGHT (Y)	-62 mm
FOOT HEIGHT	155 mm	FOOT ADJUSTMENT	155/250 mm
IPX RATING	4	WIDTH	40 cm
DEPTH	70 cm	HEIGHT	90 cm
PACKAGE WIDTH	81,0 cm	PACKAGE DEPTH	47,0 cm
PACKAGE HEIGHT	114,0 cm	NET WEIGHT	37 kg
GROSS WEIGHT	47 kg	VOLUME	0,43 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	717.5 W
SENSIBLE HEAT RELEASE	3280.0 W	STEAM RELEASE	1053.7 g/h

ACCESSORIES

319002 STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719004 TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=40CM)
719040 SIDE HEAT PROTECTION DEVICE
799503 SIDE COVERING PANEL FOR FREESTANDING MODULE
799506 PAIR OF CLOSING ELEMENTS (L=70CM)

TECNOINOX Srl reserves the right to make changes at any time, even without notice.
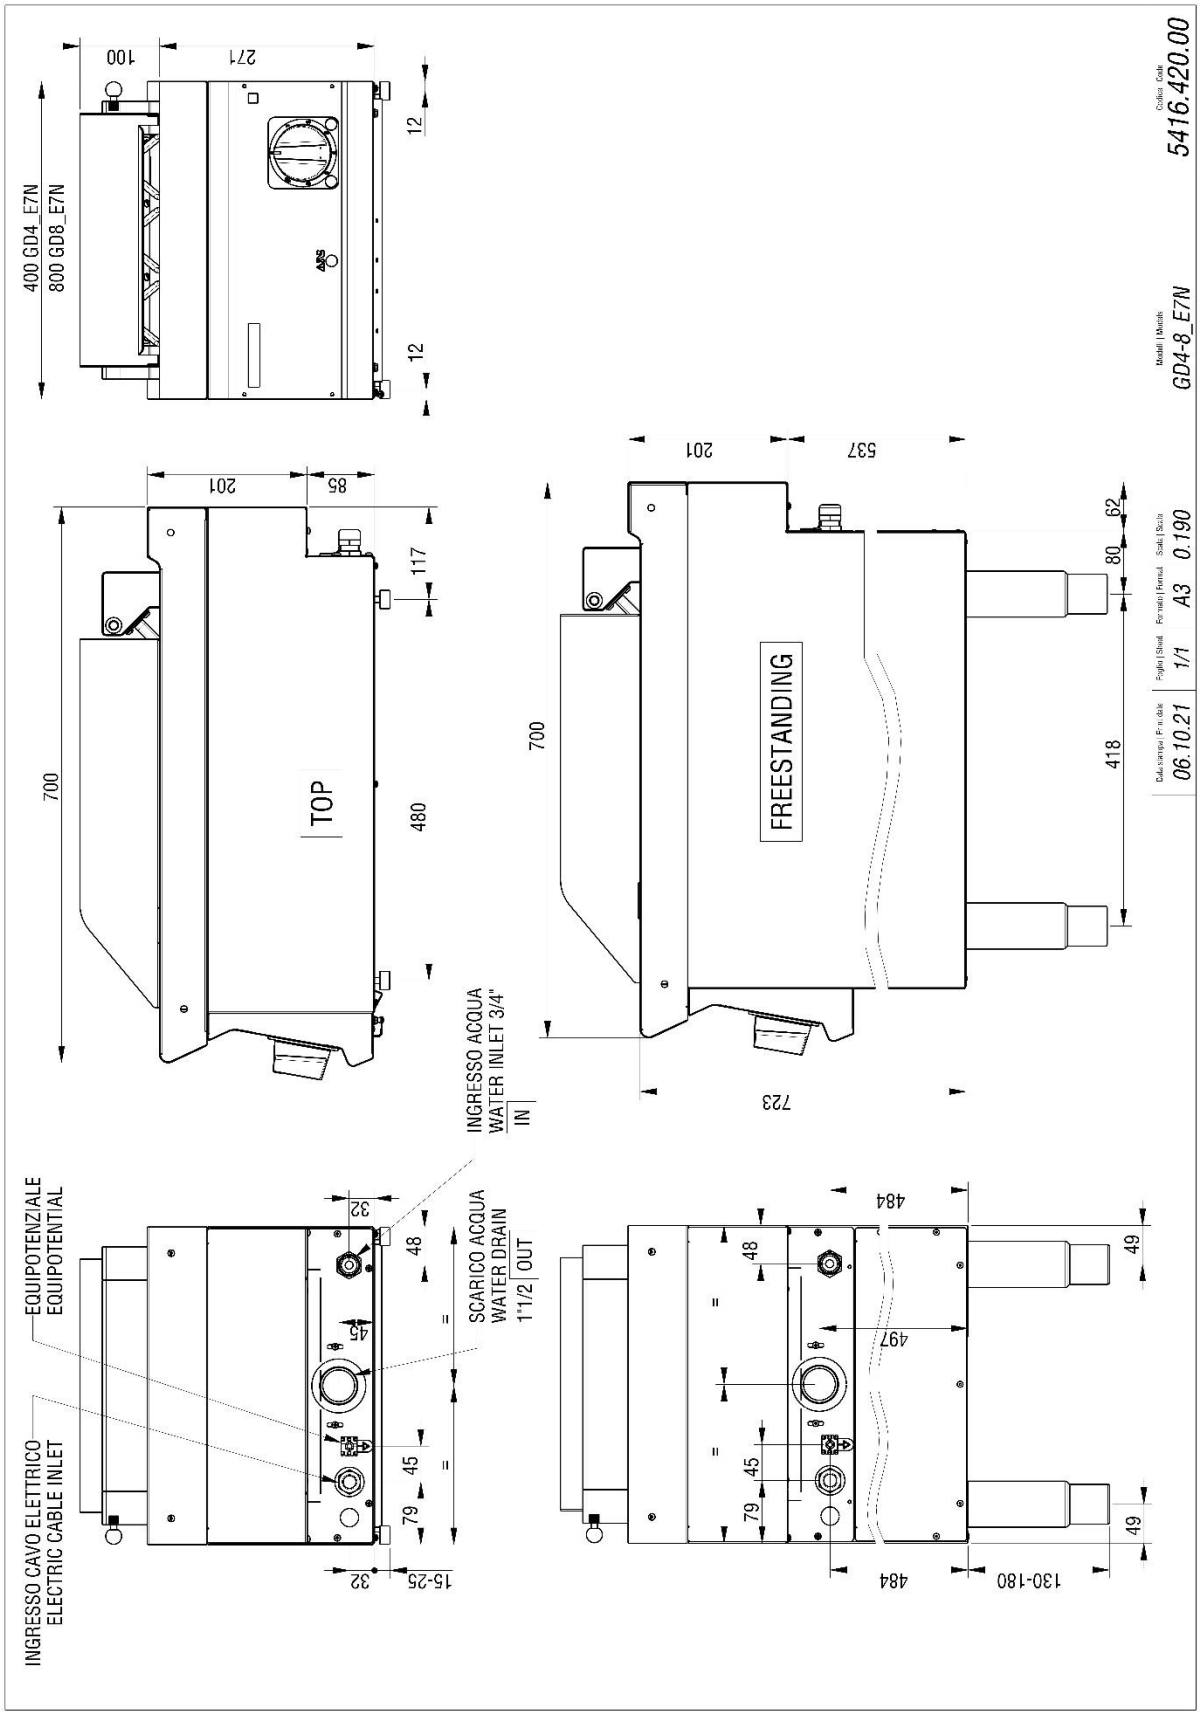
INSTALLATION SCHEMES