# TECNO74

## 716234

FTRR8BFE7

**FREESTANDING ELECTRIC GRIDDLE WITH BRUSHED, CHROME-PLATED, RIBBED PLATE ON OPEN CABINET**

- Freestanding electric griddle on an open cabinet (80 cm) with a brushed chrome-plated, ribbed cooking plate to cook a variety of products: from meat to fish and vegetables.
- Deep drawn worktop with a hermetically welded recessed cooking plate, featuring large cooking area with rounded corners for enhanced hygiene and easy cleaning.
- Sloped cooking plate (12 mm thick) to facilitate the drainage of grease and liquids.
- The anti-scratch cooking plate ensures resistance to scratches and corrosion, while the striping enhances product grilling.
- The non-stick plate ensures quick and effortless cleaning, prevents oxidation, and eliminates any flavour transfer.
- The chrome-plated surface ensures less energy consumption and heat dispersion.
- 2 independent cooking zones.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).
- Chrome-plated griddles comply with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Equipment intended for direct cooking of food, use for heating pots or pans is not permitted.
- Heating through stainless steel armoured heating elements.
- Operating thermostatic valve with temperature control ranging between 70°C and 310°C.
- Heating and control commands specific for each zone.
- Removable liquid and grease collection drawer with overflow hole.
- Fitted with a safety thermostat that triggers in case of abnormal operation.
- Removable splashback on 3 sides and cap supplied.
- Technical compartment for easy connection to the electrical network mains.

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

## TECHNICAL DATA

| | | | |
|---|---|---|---|
| TOTAL POWER | 7,8 kW | ELECTRIC POWER | 7,8 kW |
| FREQUENCY | 50/60 Hz | VOLTAGE | 380-415 3N~ V |
| TEMPERATURE RANGE | 50÷320 °C | CABINET DIMENSIONS | 73x57,4x39,5 cm |
| MINIMUM POWER CABLE CROSS-SECTION | 5 x 1,5 n° - mm² | COOKING SURFACE | 74,8x56,4 cm |
| ELECTRIC CABLE TYPE | H07 RN-F | PLATE TYPE | Brushed chrome-plated - ribbed |
| HEATING ZONES | n° 2 | ELECTRICAL CONNECTION HEIGHT (H) | 660 mm |
| ELECTRICAL CONNECTION HEIGHT (X) | 721 mm | ELECTRICAL CONNECTION HEIGHT (Y) | -63 mm |
| FOOT HEIGHT | 155 mm | FOOT ADJUSTMENT | 155/250 mm |
| IPX RATING | 4 | WIDTH | 80 cm |
| DEPTH | 70 cm | HEIGHT | 90 cm |
| PACKAGE WIDTH | 87 cm | PACKAGE DEPTH | 81 cm |
| PACKAGE HEIGHT | 114,0 cm | NET WEIGHT | 82,5000 kg |
| GROSS WEIGHT | 102 kg | VOLUME | 0,80 m³ |
| HARMONISED CODE | 84198180 | LATENT HEAT RELEASE | 3120.0 W |
| SENSIBLE HEAT RELEASE | 2574.0 W | STEAM RELEASE | 4586.4 g/h |

## ACCESSORIES

120595 GRIDDLE-CLEANING SCRAPER
120597 SCRAPER - SPARE BLADE KIT (10 PCS)
319002 STAINLESS STEEL RH/LH DOOR FOR TECNO74, TECNO90, MOSAICO74, MOSAICO90
719005 TECNO74 REAR COVERING PANEL FOR FREESTANDING ELEMENTS (L=80CM)
719040 SIDE HEAT PROTECTION DEVICE
799503 SIDE COVERING PANEL FOR FREESTANDING MODULE
799506 PAIR OF CLOSING ELEMENTS (L=70CM)

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

## INSTALLATION SCHEMES

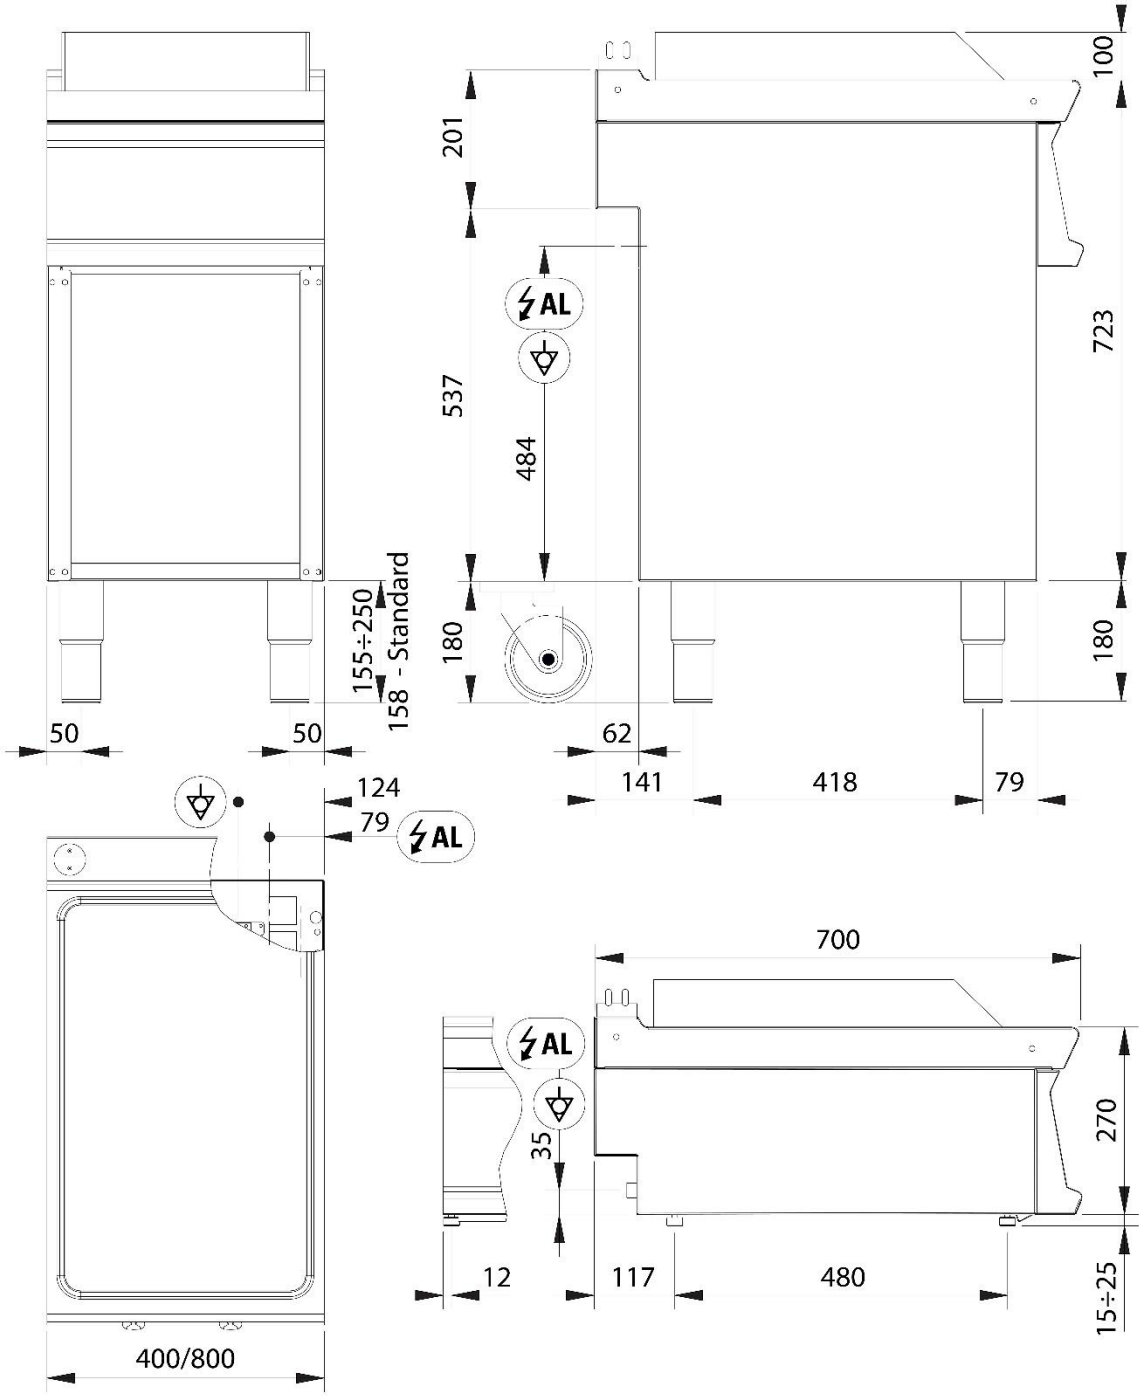


Fig.1 | Abb.1 | рис.1 - 5415.654.00