


713202

PCH12G7

6-BURNER HERMETIC GAS BOILING TOP WITH CAST IRON GRIDS (TOP VERSION)





- 6-burner gas boiling top (120 cm), top version.
- \bullet High-efficiency hermetic burners, cast-iron base and brass flame spreader with power 5 kW and 7,5 kW
- Deep drawn worktop with rounded corners to avoid overflow and for maximum hygiene and easy cleaning.
- Main burner ignition via always-on pilot burner with safety thermocouple.
- · Valved gas cock.
- Setup for installing a water tap.
- Enamelled cast iron pan support grid to resist acids, acids, alkalis and flames.
- Height-adjustable rubberised plastic feet (15-25 mm).
- AISI 304 stainless steel worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Technical compartment to facilitate connection to the gas network.
- The gas appliances are CE-certified by German body DVGW and have passed the most stringent safety tests.
- The supply of the equipment follows the customer's wishes in terms of nozzles installed, even during the testing phase. The standard configuration is G20 natural gas. In addition, a set of nozzles is supplied should conversion on site be necessary.



TECHNICAL DATA			
TOTAL POWER	37,5 kW	GAS POWER	37,5 kW
OPEN BURNER POWER	3x5 + 3x7,5 n°- kW	BOILING TOP POWER	37,5 kW
NATURAL GAS CONSUMPTION	3,96 m³/h	LPG CONSUMPTION	2.96 m³/h
NUMBER OF BURNERS	n° 6	BOILING PAN SUPPORT	RAAF enamelled cast iron
GAS CONNECTION DIAMETER	3/4"G EN10226-1	GAS CONNECTION HEIGHT (H)	35 mm
GAS CONNECTION HEIGHT (X)	1166 mm	GAS CONNECTION HEIGHT (Y)	-63 mm
FOOT HEIGHT	15 mm	FOOT ADJUSTMENT	15/25 mm
WIDTH	120 cm	DEPTH	70 cm
HEIGHT	28 cm	PACKAGE WIDTH	127,0 cm
PACKAGE DEPTH	81,0 cm	PACKAGE HEIGHT	54,0 cm
NET WEIGHT	79,1 kg	GROSS WEIGHT	89,6 kg
VOLUME	0,5500 m ³	HARMONISED CODE	84198180

SENSIBLE HEAT RELEASE

11250.0 W

ACCESSORIES

LATENT HEAT RELEASE

STEAM RELEASE

319068 HERMETIC FLAME SPREADER (5 - 6 - 7 KW)

4500.0 W

6600.0 g/h



INSTALLATION SCHEMES

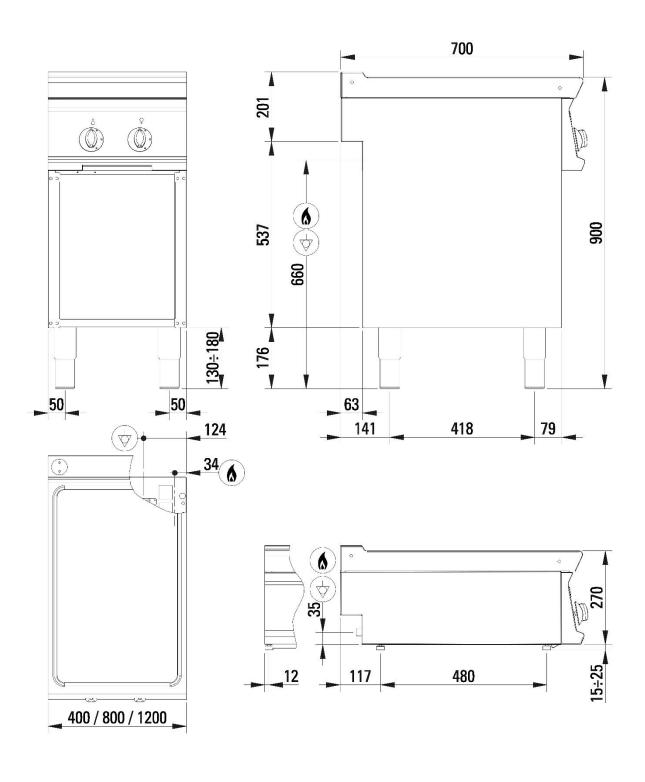


Fig.1 | Abb.1 | рис.1 - 5415.649.00