116044 GR70E/6/0 ELECTRIC GRILL WITH WATER (TOP VERSION)

- Electric water grill (70 cm top version) with 2 independent cooking zones.
- Stainless steel control panel and side panels.
- Module coupling system with external side joints.
- AISI 304 worktop with Scotch Brite finish.
- AISI 304 stainless steel tank.
- Stainless steel tilting armoured heating elements.
- Energy regulator (from 1 to 6) with maximum temperature of 300°C.
- AISI 304 stainless steel grill complying with EU Regulation 1935/2004 concerning food contact materials and articles which are intended to come into contact with food.
- Safety micro switch in the raised position of the heating elements.
- Manual water filling.
- Front drain with elbow extension included.
- Plastic feet (H=51 mm).

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

TECHNICAL DATA

TOTAL POWER	6 kW	ELECTRIC POWER	6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
MINIMUM POWER CABLE CROSS-SECTION	5 x 1,5 n° - mm²	COOKING SURFACE	50x40 cm
ELECTRIC CABLE TYPE	H07 RN-F	HEATING ZONES	n° 2
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	647 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-445 mm	FOOT HEIGHT	51 mm
IPX RATING	4	WIDTH	70 cm
DEPTH	60 cm	HEIGHT	30 cm
PACKAGE WIDTH	77 cm	PACKAGE DEPTH	72 cm
PACKAGE HEIGHT	54 cm	NET WEIGHT	27,5000 kg
GROSS WEIGHT	33,6 kg	VOLUME	0,30 m³
HARMONISED CODE	84198180	LATENT HEAT RELEASE	1050.0 W
SENSIBLE HEAT RELEASE	4800.0 W	STEAM RELEASE	1542.0 g/h

ACCESSORIES

120585 JOINT FOR TECNO60, TECNO65
120666 TECNO60 SPLASHBACK L=700MM

TECNOINOX Srl reserves the right to make changes at any time, even without notice.

INSTALLATION SCHEMES

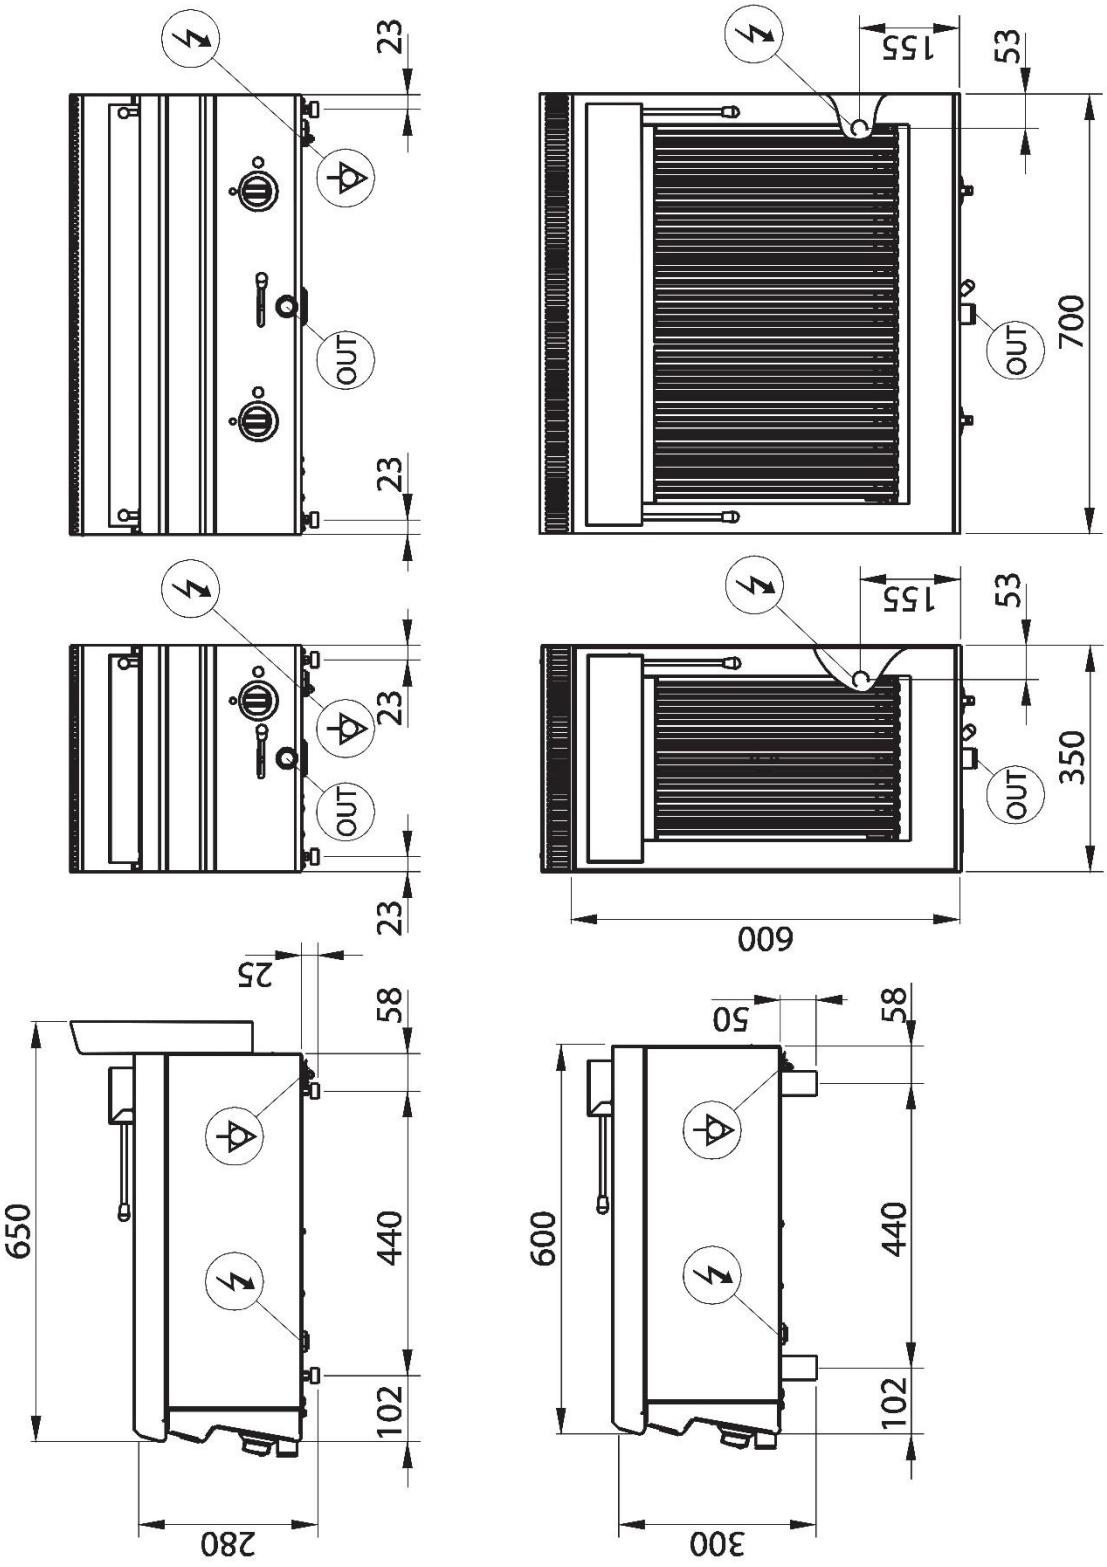

Fig.1 | Abb.1 | рис.1 - 5415.687.00

AI = Entrata cavo elettrico | Power supply cable inlet | Netzkabeleingang | Вход электропровода | Entrée câble électrique | Entrada cable eléctrico.