
316202**CPD4FE9N****FREESTANDING ELECTRIC SINGLE TANK 40L
PASTA COOKER ON CLOSED CABINET - BASKETS
NOT INCLUDED**



- Freestanding GN1/1 electric pasta cooker 40 L with electronic control on a closed cabinet (40 cm).
- Power: 8.4 kW.
- AISI 304 stainless steel 2mm thick worktop and Scotch Brite finish with internal side-by-side joining system.
- AISI 304 stainless steel control panel and side panels.
- Pasta cookers are used to boil rice, vegetables, meat and other products.
- The electronic control allows a precise temperature in the tank. It also enables vacuum cooking from 50 to 75°C.
- Cooking programmes can be saved, thus creating standardised recipes.
- Deep drawn worktop with a seamlessly welded deep drawn cooking tank, featuring rounded corners, overflow-proof tank and large foam expansion area.
- AISI 316 stainless steel tank, drainpipe and false bottom for long-lasting resistance against salt corrosion.
- Heating through infrared heating elements outside the cooking tank to facilitate cleaning and enhance durability.
- Safety thermostat to protect the tank against ignition without water or excessive evaporation.
- Water inlet on the rear of the worktop.
- Overflow for draining starch in the front part of the tank.
- Bottom drain.
- Technical compartment for easy connection to the electrical network.
- Baskets not included.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

TECHNICAL DATA

TOTAL POWER	8,4 kW	ELECTRIC POWER	8,4 kW
FREQUENCY	50/60 Hz	VOLTAGE	380-415 3N~ V
TANK CAPACITY	40lt	LOADING WATER	Water inlet on the worktop
TANK DIMENSIONS	30,5x51x31 cm	MINIMUM POWER CABLE CROSS-SECTION	5 x 4 n° - mm²
ELECTRIC CABLE TYPE	H07 RN-F	TANK TYPE	AISI 316
WATER CONNECTION POSITION	Bottom	WATER DRAIN POSITION	Bottom
ELECTRICAL CONNECTION HEIGHT (Y)	-672 mm	WATER CONNECTION DIAMETER	1/2"
WATER CONNECTION HEIGHT (H)	0 mm	WATER CONNECTION HEIGHT (X)	224 mm
WATER CONNECTION HEIGHT (Y)	-620 mm	DRAIN DIAMETER	1"
DRAIN CONNECTION HEIGHT (H)	0 mm	DRAIN CONNECTION HEIGHT (X)	294 mm
DRAIN CONNECTION HEIGHT (Y)	-620 mm	FOOT HEIGHT	133 mm
FOOT ADJUSTMENT	133/195 mm	IPX RATING	4
WIDTH	40 cm	DEPTH	90 cm
HEIGHT	90 cm	PACKAGE WIDTH	46 cm
PACKAGE DEPTH	101 cm	PACKAGE HEIGHT	115 cm
NET WEIGHT	56,8 kg	GROSS WEIGHT	66,2 kg
VOLUME	0,53 m³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1680.0 W	SENSIBLE HEAT RELEASE	294.0 W
STEAM RELEASE	2469.6 g/h		

ACCESSORIES

- 120650 LID (GN1/1)
- 319009 REAR COVERING PANEL FOR CABINET (L=40CM)
- 399504 PASTA COOKER BASKET (3 X GN1/3) - DIM. CM (29X16X20H)
- 399505 PASTA COOKER BASKET (1 X GN1/3 + 2 X GN2/6) - DIM. CM (29X16X20H)
- 399506 PASTA COOKER BASKET (2 X GN1/3 + 2 X GN1/6) - DIM. CM (29X16X20H) (14X14X20H)
- 399507 PASTA COOKER BASKET (1 X GN1/3 + 4 X GN1/6) - DIM. CM (29X16X20H) (14X14X20H)
- 399508 PASTA COOKER BASKET (1 X GN1/3 + 1 X GN2/3) - DIM. CM (29X16X20H) (29X29X20H)
- 399548 PASTA COOKER BASKET (6 X GN1/6) - DIM. CM (14X14X20H)
- 399553 PASTA COOKER BASKET (2 X GN1/2) - DIM. CM (29X24X20H)
- 399572 PASTA COOKER BASKET (GN1/1) - DIM. CM (49X29X20H)
- 399573 PAIR OF CLOSING ELEMENTS FOR BASES AND WORKTOPS (L=90CM)

INSTALLATION SCHEMES

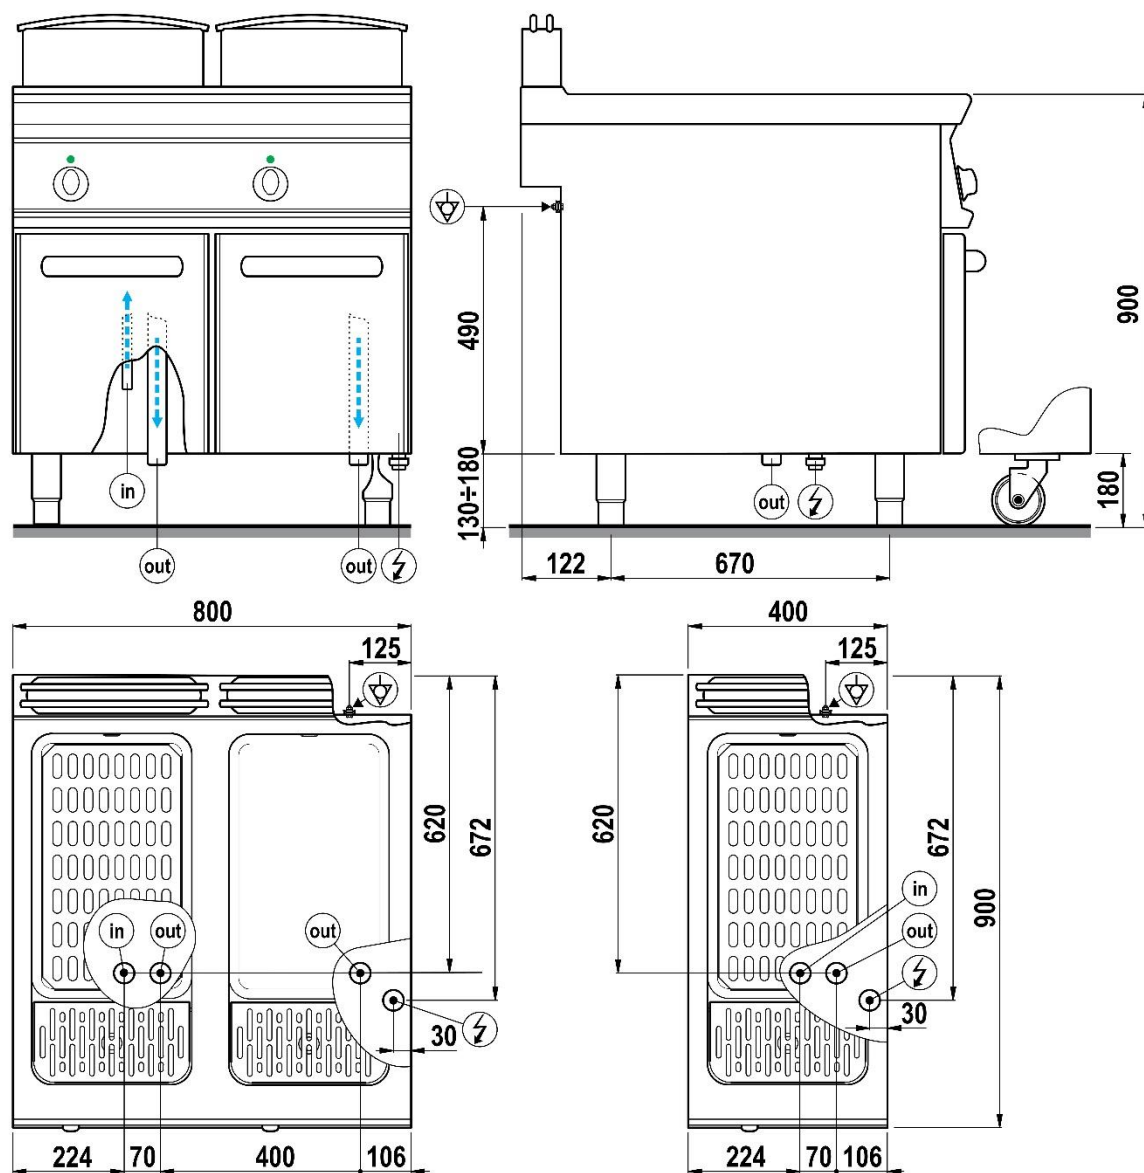


Fig.1 | Abb.1 | рис.1 - 5415.639.00