


**616115**

PFR70E7

**3+1 ROUND HERMETIC HOT PLATES ELECTRIC  
BOILING TOP ON GN2/1 ELECTRIC STATIC OVEN  
WITH 1 GRID (DIAM 22CM - 8.7IN & DIAM15CM -  
5.9IN)**



- Electric boiling top (70 cm) with cast-iron, round plates (3 with a diameter of 22 cm and 1 with a diameter of 15 cm) on a GN 2/1 electric static oven.
- Deep drawn worktop featuring rounded corners to prevent overflows and ensure enhanced hygiene and easy cleaning. Made with AISI 304 stainless steel with Scotch Brite finish.
- Cast iron electric plates hermetically fixed to the deep drawn worktop.
- 3x2.6 kW and 1x1.5 kW power for each plate adjustable to 6 levels.
- Temperature limiter inside the plates to reduce energy consumption.
- Heating commands and separated controls for each plate.
- Lights warning when the plates are ignited.
- AISI 304 stainless steel height-adjustable feet (133/195 mm).

>> GN 2/1 ELECTRIC STATIC OVEN

>> Stainless steel oven door and cooking chamber.

>> Long-lasting steel mesh and glass fibre gasket resistant to high temperatures.

>> Heating through upper and lower heating elements that can be enabled together or individually.

>> Thermostatic control 60-270°C.

>> Stainless steel removable side tray racks.

- Stainless steel control panel, side and back panels.
- Module coupling system with external side joints.
- Technical compartment to facilitate connection to the electrical network.

## TECHNICAL DATA

TOTAL POWER	14,6 kW	ELECTRIC POWER	14,6 kW
FREQUENCY	50/60 Hz	VOLTAGE	400 3N ~ V
OVEN POWER	5,3 kW	BOILING TOP POWER	9,3 kW
COOKING ZONE POWER	3x2,6 + 1x1,5 n°- kW	TRAY CAPACITY	n° 4xGN2/1
COOKING CHAMBER DIMENSIONS	57,5x65x30 cm	OVEN DIMENSIONS	GN2/1
ELECTRIC PLATE DIMENSIONS	3xØ22 + 1xØ15 cm	GUIDES	n° 4
NUMBER OF COOKING ZONES	n° 4	VERTICAL DISTANCE BETWEEN TRAYS	6 cm
OVEN TEMPERATURE RANGE	60÷270 °C	MINIMUM POWER CABLE CROSS-SECTION	5 x 2,5 n° - mm <sup>2</sup>
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Static
ELECTRICAL CONNECTION HEIGHT (H)	0 mm	ELECTRICAL CONNECTION HEIGHT (X)	618 mm
ELECTRICAL CONNECTION HEIGHT (Y)	-516 mm	FOOT HEIGHT	155 mm
FOOT ADJUSTMENT	155/250 mm	IPX RATING	4
WIDTH	70 cm	DEPTH	70 cm
HEIGHT	85 cm	PACKAGE WIDTH	77 cm
PACKAGE DEPTH	81 cm	PACKAGE HEIGHT	115 cm
NET WEIGHT	72,8 kg	GROSS WEIGHT	88,8 kg
VOLUME	0,72 m <sup>3</sup>	HARMONISED CODE	84198180
LATENT HEAT RELEASE	1168,0 W	SENSIBLE HEAT RELEASE	2920,0 W
STEAM RELEASE	1722,8 g/h		

## ACCESSORIES

220585	JOINT
220590	EXTRA OVEN GRID GN2/1 (53X63CM)
619012	GN2/1 INOX TRAY

INSTALLATION SCHEMES

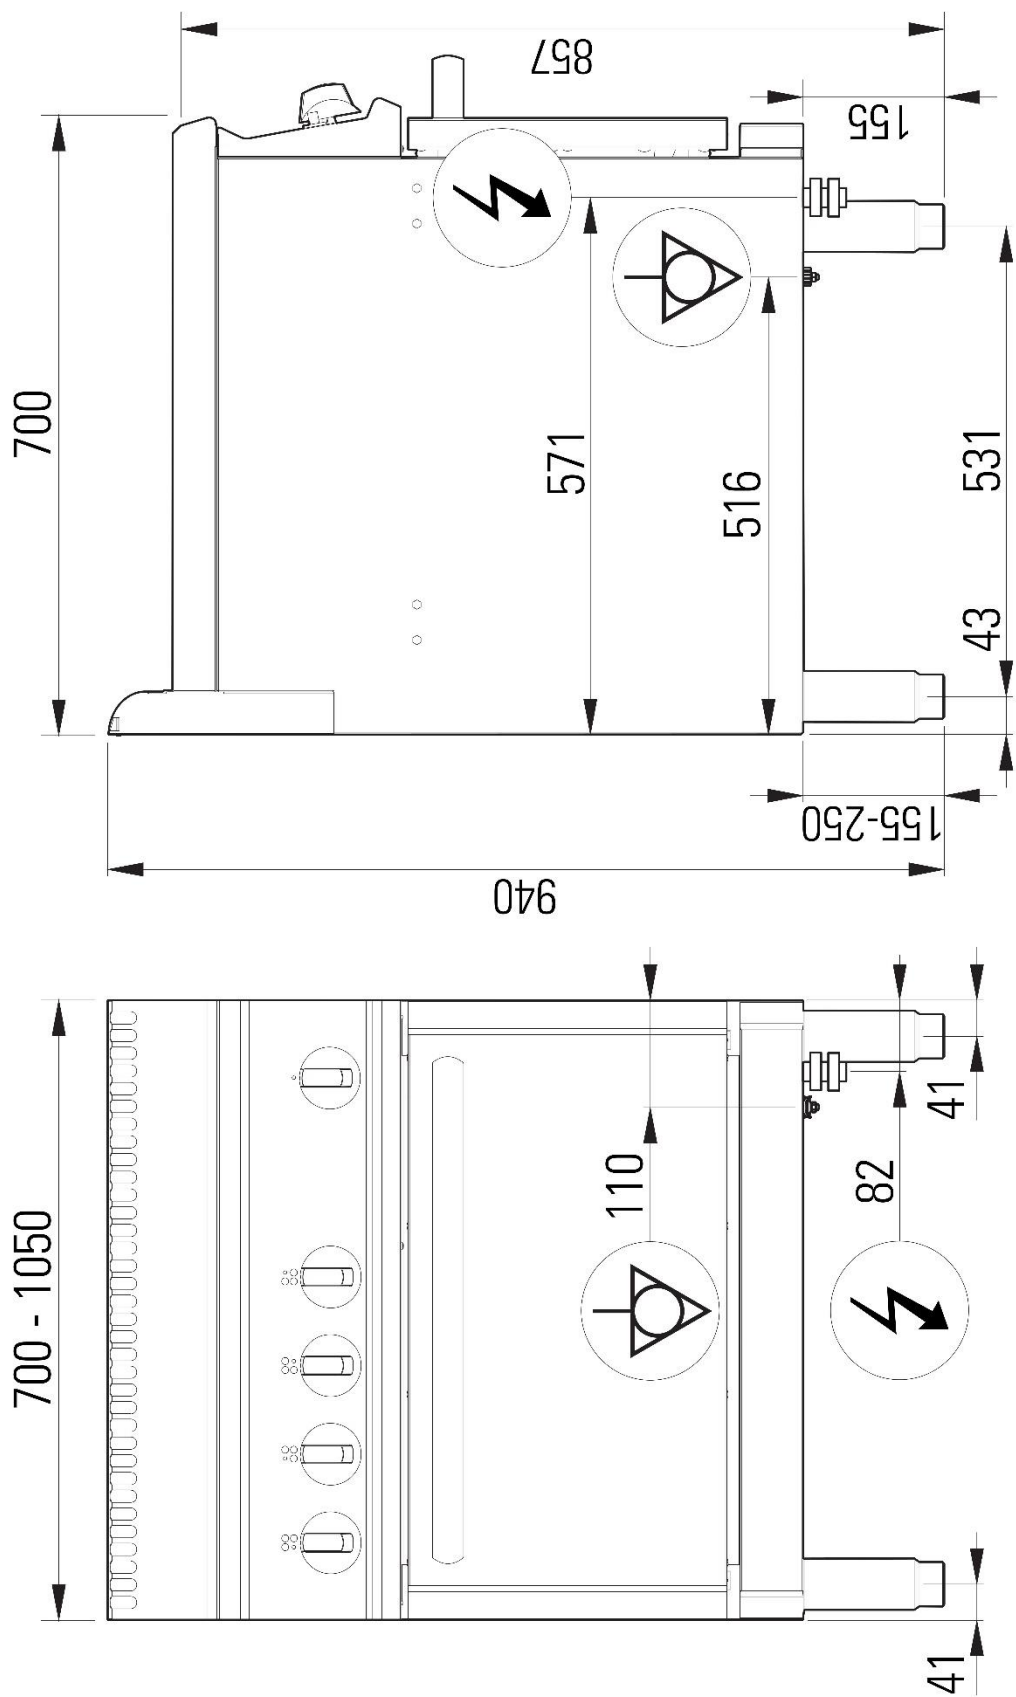


Fig.1 | Abb.1 | рис.1 - 5415.553.00