

954346

GOM20TSLB

TECNOCOMBI NEXT GAS COMBI STEAMER WITH 20 TRAYS GN1/1 WITH BOILER, TOUCH SCREEN, PROGRAMMABLE RECIPES, AUTOMATIC WASHING - COMPATIBLE WITH THE 16-TRAY PASTRY TROLLEY (600X400) MM



- Cooking chamber made of AISI 304 stainless steel (1 mm thick) featuring rounded corners to prevent dirt buildups. The polished steel finish improves heat refraction, reduces steel roughness, and prevents corrosion from chemicals, allowing easy removal of food residues.
- AISI 304 watertight door with high-performance and easily replaceable gasket and 2 glass panes: the outer pane is 4 mm thick and the inner pane is 6 mm thick with a thermal reflective treatment for enhanced energy efficiency. Air tunnel in the door for operator safety.
- Anti-slip and anti-fingerprint handle with right/left opening.
- The interface is as user-friendly as a smartphone, thanks to a 7-inch capacitive touch display.
- The cooking parameters are easily visible at a glance, thanks to the automatic distance display mode.
- The 8 cooking cycles help save energy and obtain excellent results.
- The professional fans are governed by an inverter, work with 4 speeds and stop instantly when rotation is reversed and the door is opened.
- In the mixed cycle you can manage up to 19 humidity levels at 5% intervals from 0% to 90%.
- Programmable steam puff up to 20 seconds, enhancing humidity levels in the cooking chamber during convection mode.
- Up to 300 cooking programs, including both uploaded and chef-created ones.
- Multifood technology for cooking several foods simultaneously.
- Automatic self-cleaning including 4 cycles, with the longest lasting only 62 minutes.
- Multipoint core probe with 4 detection points included.
- Cloud platform for controlling recipes and ovens easily.
- HACCP and consumption data recording.


TECHNICAL DATA

TOTAL POWER	47 kW	GAS POWER	46 kW
ELECTRIC POWER	1 kW	FREQUENCY	50/60 Hz
VOLTAGE	220-240 ~ V	MOTOR FAN ELECTRIC POWER	1 kW
TRAY CAPACITY	n° 20xGN1/1	MAXIMUM FOOD LOAD	80 Kg
LPG CONSUMPTION	3.62 kg/h	COOKING CHAMBER DIMENSIONS	68x45x148 cm
GUIDES	n° 20	VERTICAL DISTANCE BETWEEN TRAYS	6,5 cm
MINIMUM POWER CABLE CROSS-SECTION	3 x 1,5 n° - mm ²	THERMAL INSULATION THICKNESS	35 mm
STEAM CYCLE TEMPERATURE	50÷120 °C	MIXED CYCLE TEMPERATURE	50÷250 °C
CONVECTION CYCLE TEMPERATURE	50÷265 °C	TIMER	0-540 min
ELECTRIC CABLE TYPE	H07 RN-F	OVEN TYPE	Digital - GN1/1 tray
FAN SPEED	4	WATER CONNECTION POSITION	18cm
WATER DRAIN POSITION	18cm	ELECTRICAL CONNECTION HEIGHT (H)	176,8 mm
ELECTRICAL CONNECTION HEIGHT (X)	913,2 mm	ELECTRICAL CONNECTION HEIGHT (Y)	0 mm
WATER CONNECTION DIAMETER	3/4"	WATER CONNECTION HEIGHT (H)	231,8 mm
WATER CONNECTION HEIGHT (X)	913,2 mm	WATER CONNECTION HEIGHT (Y)	0 mm
SOFTEN WATER CONNECTION HEIGHT (H)	291,8 mm	SOFTEN WATER CONNECTION HEIGHT (X)	913,2 mm
SOFTEN WATER CONNECTION HEIGHT (Y)	0 mm	DRAIN DIAMETER	1,9685"
DRAIN CONNECTION HEIGHT (H)	76,8 mm	DRAIN CONNECTION HEIGHT (X)	743,2 mm
DRAIN CONNECTION HEIGHT (Y)	0 mm	FOOT HEIGHT	215 mm
FOOT ADJUSTMENT	215/250 mm	IPX RATING	3
WIDTH	100 cm	DEPTH	94 cm
HEIGHT	186 cm	PACKAGE WIDTH	108 cm
PACKAGE DEPTH	110 cm	PACKAGE HEIGHT	208 cm
NET WEIGHT	349 kg	GROSS WEIGHT	374 kg
VOLUME	2,47 m ³	HARMONISED CODE	84198180
LATENT HEAT RELEASE	8280.0 W	SENSIBLE HEAT RELEASE	6900.0 W
STEAM RELEASE	12190.0 g/h		

ACCESSORIES

9032	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=20MM	9033	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=40MM
9034	GN1/1 STAINLESS STEEL SMOOTH BAKING TRAY H=65MM	9055	GN1/1 STAINLESS STEEL BAKING GRID
9056	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=20MM	9057	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=40MM
9058	GN1/1 STAINLESS STEEL PERFORATED BAKING TRAY H=65MM	9059	GN1/1 ENAMELLED BACKING TRAY H=20MM
9060	GN1/1 ENAMELLED BACKING TRAY H=40MM	9061	GN1/1 ENAMELLED BACKING TRAY H=65MM
951912	EXTERNAL SPRAY GUN	951915	ALKALINE DETERGENT TANK (10LT) FOR OVENS
951917	ALUMINIUM TRAY WITH HEAT RETENTION FOR PIZZA (GN1/1)	951933	ALUMINIUM SMOOTH TEFLON COATED TRAY WITH HEAT RETENTION
951934	ALUMINIUM RIBBED TEFLON COATED TRAY WITH HEAT RETENTION	951942	20-TRAY RACK TROLLEY (GN1/1)
951947	DESCALER FOR A 10L BOILER	951953	TEFLON COATED ALUMINIUM TRAY GN1/1
951954	PERFORATED TEFLON COATED ALUMINIUM TRAY GN1/1	951997	RAMPA CARRELLO 20TG MY24

INSTALLATION SCHEMES

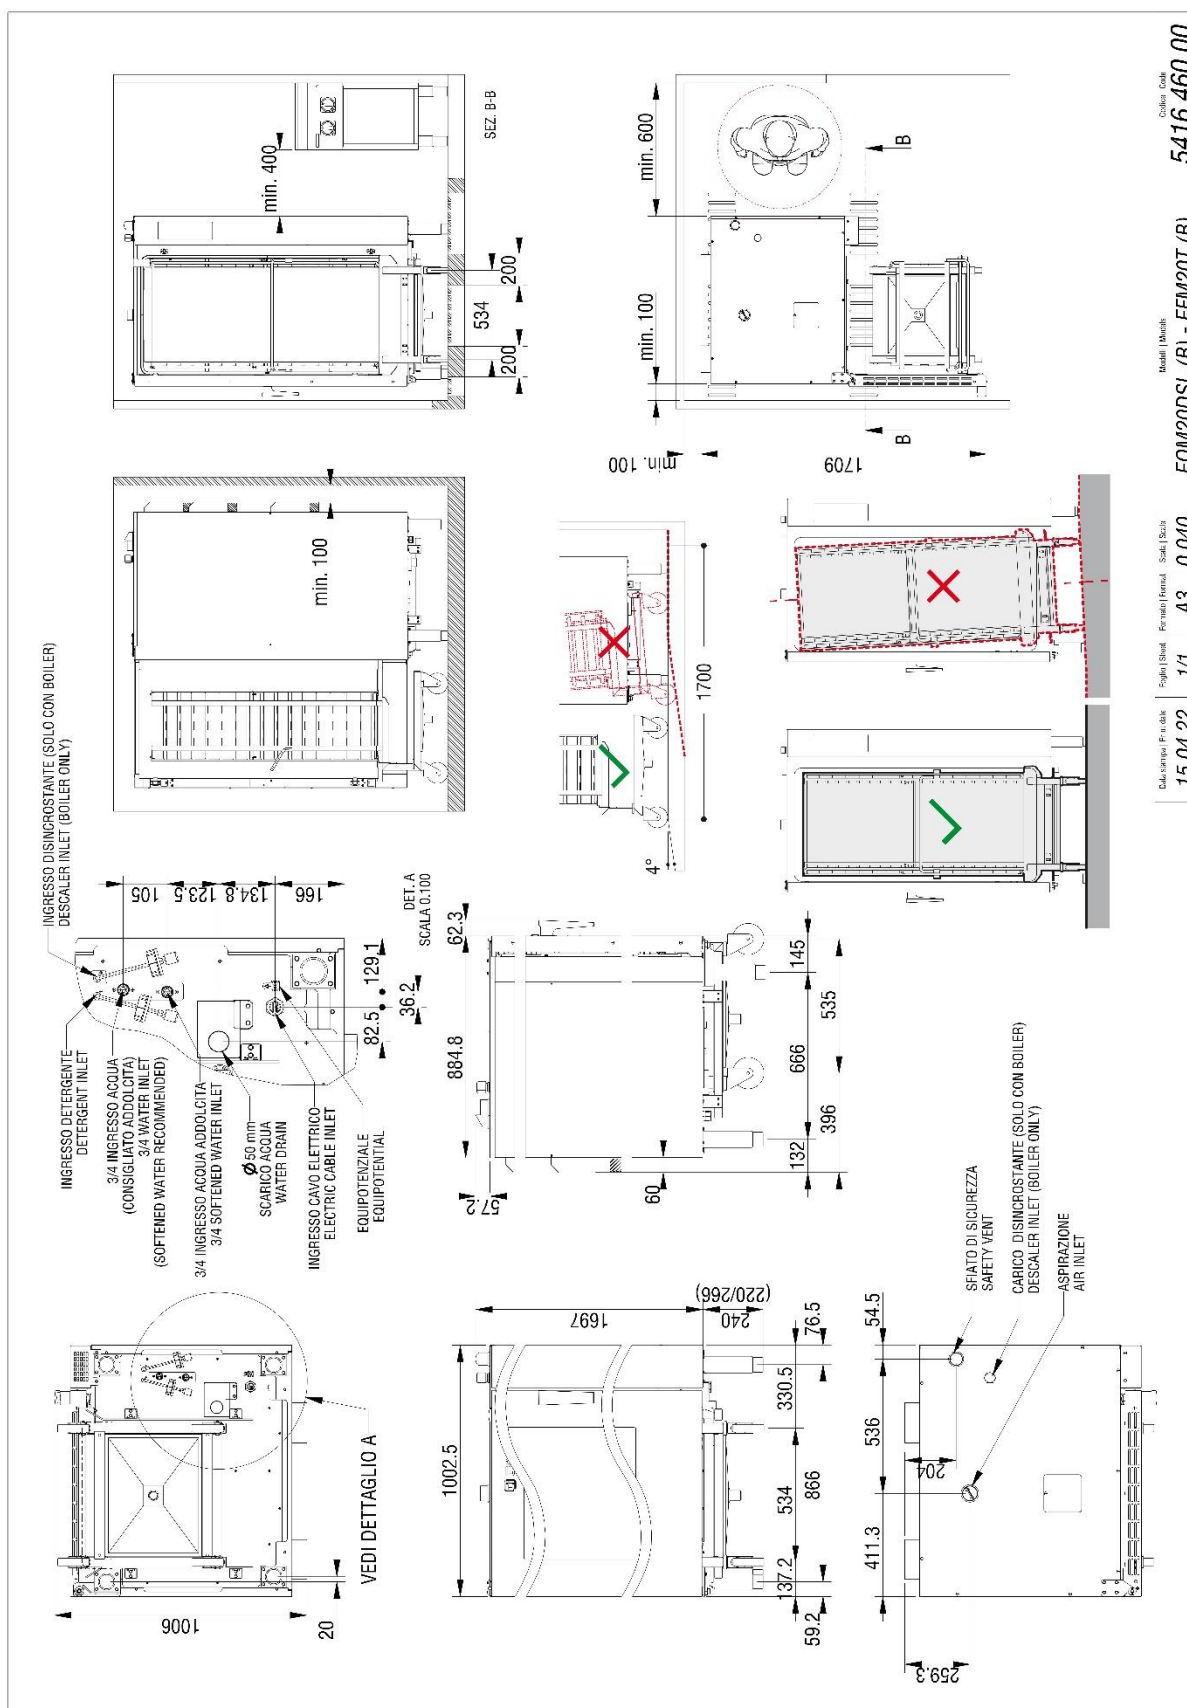

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)

Modello | Modello
EOM20DSL (B) - EFM20T (B)